

AREVIK STELA

LED_decorative family

IP20

IK03



T_a25



THE FAMILY OF ARCHITECTURAL LED WALL LIGHTS OPERATING AT 6W 220AC INPUT DELIVERING OUTSTANDING PERFORMANCE OF 360LM.



Technical description

Luminaire was designed to be used as a decorative wall light to illuminate an area where a luxury atmosphere. Body material is raw brass without any extra coating. PMMA optic lens with very uniform and anti-glaring distribution. The sleek and classic design of this wall light is complemented by its advanced functionality. You can also change the color temperature of the light from a calming warm white to an invigorating day light/neutral tone. The lamp contains no tungsten, mercury, or other toxic materials or fragile glass parts. Its unique design makes for a great conversation piece while enhancing any kind of traditional, urban, contemporary, or minimalist decor. Available in oxidized gold, nickel or copper with a high glass, matte or brushed finish.



Application

- Hotel
- Home
- Office

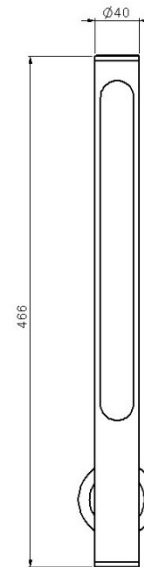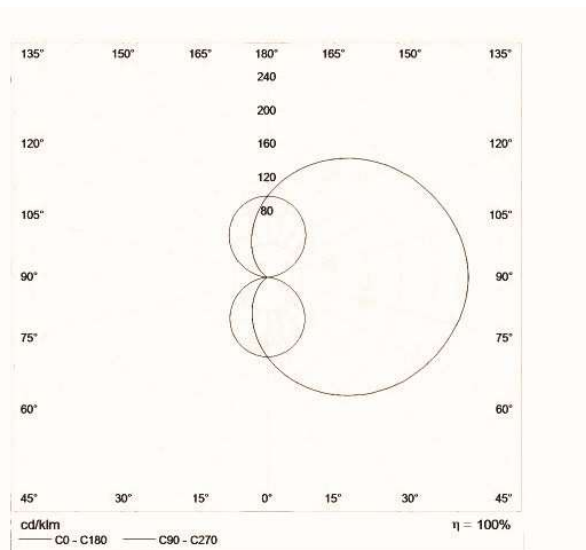

Correlated color temperature: 3000-6000 kelvin
Rated median useful life: 50000h L70 at 25°C
Luminaire input power: 6 w

Dimensions: Ø40 x 466 mm
Total power: 6 w
Luminaire luminous flux: 360 lm
Luminaire efficacy: 60 lm/w
Weight: 1.6 kg

Installation and Mounting

For wall-mounting with the special base U shape bracket can be installed with the light beam in any direction (up, down, left, right)