

AREVIK TRIFID

LED_decorative family

IP20

IK03



T_a25



THE FAMILY OF ARCHITECTURAL LED WALL LIGHTS OPERATING AT 18W 220AC INPUT DELIVERING OUT STANDING PERFORMANCE OF 540LM.



Technical description

Luminaire was designed to be use as a decorative wall light to illumination area where luxury atmosphere. Body material is the raw brass without any extra coating opaque. PMMA optic lens with very uniform and anti-glaring distribution. The sleek and classic design of this wall light is complemented by its advanced functionality. In addition, you change the color temperature of the light from a calming warm white to an invigorating day light/neutral tone. The lamp contains no tungsten, mercury, or other toxic materials or fragile glass parts. Its unique design makes for a great conversation piece while enhancing any kind of traditional, urban, contemporary, or minimalist decor. Available in oxidized gold, nickel or copper with a high glass, matte or brushed finished.



Application

- Hotel
- Home
- Decorative

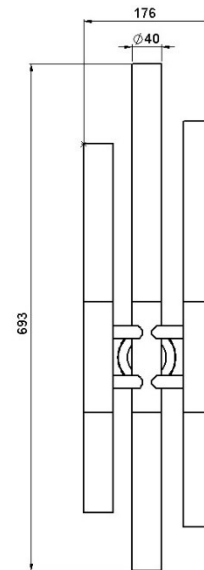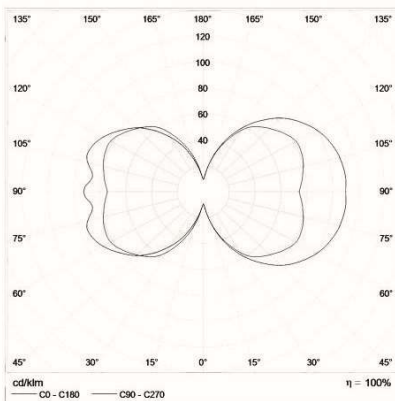

Correlated color temperature: 3000-6000 kelvin
Rated median useful life: 50000h L70 at 25°C
Luminaire input power: 18 w

Dimensions: Ø40 x 176 x 693 mm
Total power: 18 w
Luminaire luminous flux: 540 lm
Luminaire efficacy: 30 lm/w
Weight: 3.2 kg

Installation and Mounting

For wall mounting with the special base U shape bracket can be installed with the light beam in any direction(up,down,left,right)