

MAGNETAR PENDANT 35

LED_Low voltage family

IP20

IK05



T_a25




THE FAMILY OF MAGNETAR PENDANT LIGHT LED OPERATING AT 3W, 48 VDC INPUT. DELIVERING OUT STANDING PERFORMANCE OF 330 LM.

Technical description

Magnetar pendant 35 luminaire adjustable spotlight with adapter for installation on 48V low voltage track. Integrated «power line» technology allows each spotlight on the track to be adjusted separately. Body material is extruded aluminum. Quick installation system on the track using magnets. Class I electrical, IP20(IP44 only for option). Total power: 3 w. (DALI control an option only). LED color temperature is 3000-6000 kelvin. Chromaticity tolerance (initial Macadam: 3). Color rendering Ra>80.

Application


- Decorative
- Art gallery
- Hotel
- Office
- House

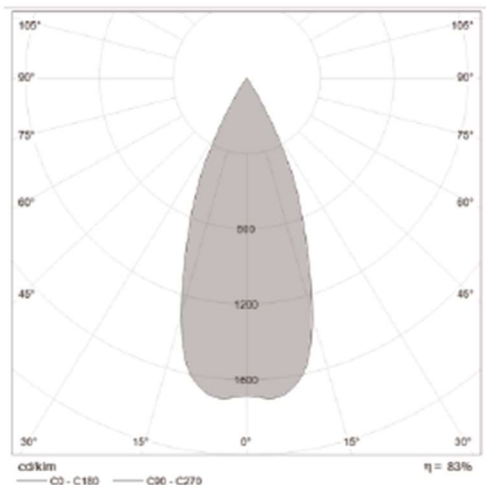

Correlated color temperature: 3000 – 6000 kelvin
Rated median useful life: 50000h L70 at 25°C
Luminaire input power: 3w

Mounting and installation

Quick installation system on the magnetar track using magnets, that embedded in luminaire.

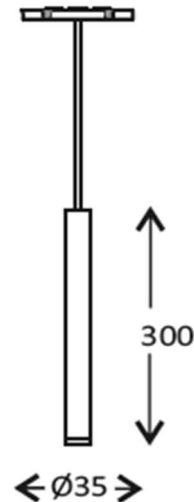

Dimensions: Ø35 x 300 mm
Total power: 3w
Luminaire luminous flux: 330 lm
Luminaire efficacy: 110 lm/w
Weight: 0.5 kg