

MAGNETAR SPOT 55

LED_Low voltage family IP20 IK05   $T_a 25$    

THE FAMILY OF MAGNETAR SPOT LIGHT LED OPERATING AT 15W, 48 VDC INPUT. DELIVERING OUT STANDING PERFORMANCE OF 1650LM.



Technical description

Magnetar spot 55 luminaires adjustable spotlight with adapter for installation on 48V low voltage track. Integrated «power line» technology allows each spotlight on the track to be adjusted separately. Body material is extruded aluminum. Quick installation system on the track using magnets. Class I electrical, IP20 (IP44 only for option). Total power: 15w. (DALI control an option only). LED color temperature is 3000 -6000 kelvins (warm white). Chromaticity tolerance (initial Macadam: 3). Color rendering $R_a > 80$.



Application

- Decorative
- Art gallery
- Hotel
- Office
- House

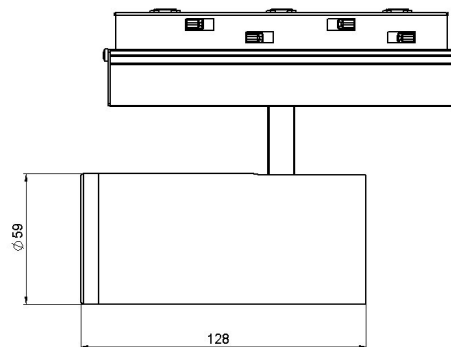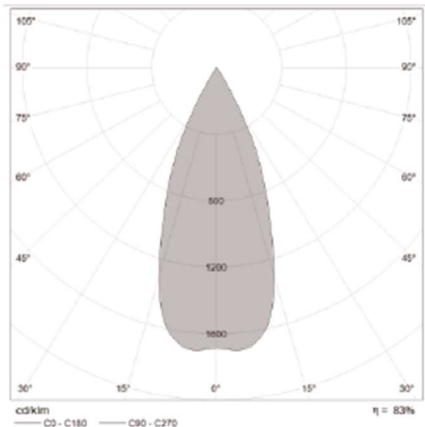

Correlated color temperature: 3000 – 6000 kelvin
Rated median useful life: 50000h L70 at 25°C
Luminaire input power: 15 w

Dimensions: Ø59 x 128 mm
Total power: 15 w
Luminaire luminous flux: 1650 lm
Luminaire efficacy: 110 lm/w
Weight: 0.9 kg

Mounting and installation

Quick installation system on the track using magnets. That embedded in luminaire.