

# MAGNETAR SURFACE TRACK 4CM

LED\_Low voltage family



## THE FAMILY OF LOW VOLTAGE SURFACE AND PENDANT MAGNETIC TRIMLESS TRACK 48VDC INPUT.


### Technical description

48V low voltage magnetic track for surface and pendant applications. Designed to house lighting elements fitted with a 48V adaptor. Made of anodized extruded aluminum, and body color is black. The integrated circuit, designed to interact with the DC/DC driver included in the adapters (drivers to be ordered separately). Metal bus bar to set spot and linear magnet linear. To obtain continuous lines, direct and corner joints are available with separate codes. 4 kg (max) load every 1000 mm, with maximum distance of 200 mm between fixing points. This rail is the base for installing all kinds of magnetic family lights such as spotlights, pendant light, tube light and .... (DALI dimming just for options).



### Application

- Decorative •
- Art gallery •
- Hotel •
- Office •
- House •

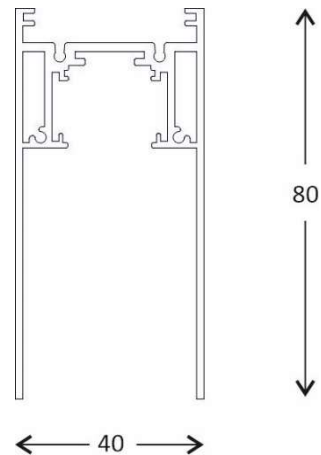

Dimensions: 4000 x 40 x 80 mm  
Max voltage: 48 V, 10 A  
Max wattage: 200 W  
Weight: 6 kg

### Mounting and installation

Ceiling or wall-recessed. free standing recessed and fix with screw