

MAGNETAR TUBE

LED_Low voltage family IP20 IK03



T_a25



**THE FAMILY OF MAGNETAR TUBE LIGHT, TUBE LED OPERATING AT 10w,
48 VDC INPUT. DELIVERING OUT STANDING PERFORMANCE OF 1000 LM.**


Technical description

This light can be rotated 350 degrees. Body material is PMMA. Quick installation system on the track using magnets. Class I electrical, IP20. Total power: 10 w. (DALI control an option only). LED color temperature is 3000-6000 kelvin. Chromaticity tolerance (initial Macadam: 3). Color rendering Ra>80.




Application

- Decorative
- Art gallery
- Hotel
- Office
- House

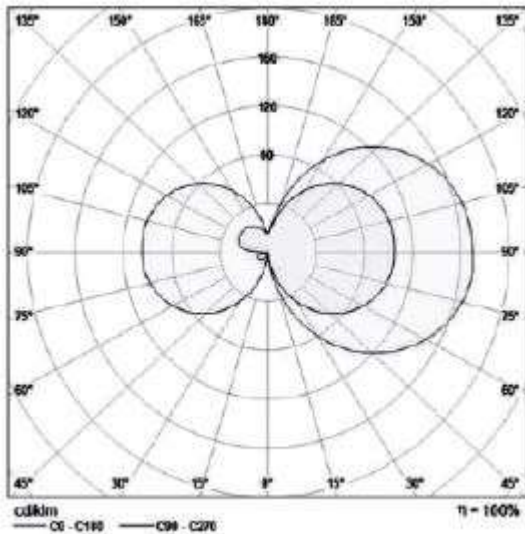

Correlated color temperature: 3000-6000 kelvin
Rated median useful life: 50000h L70 at 25°C
Luminaire input power: 10 w

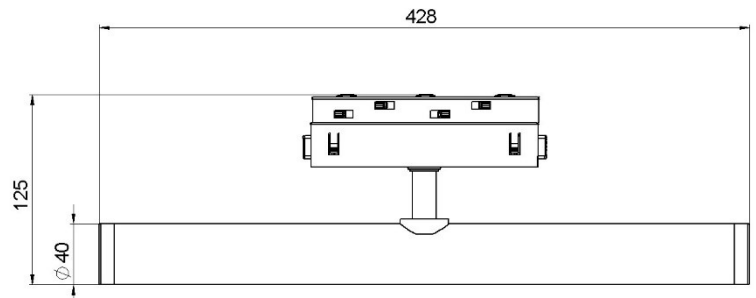

Dimensions: 428 x Ø40 x 125mm
Total power: 10 w
Luminaire luminous flux: 1000 lm
Luminaire efficacy: 100 lm/w
Weight: 0.45 kg

Mounting and installation

Quick installation system on the track using magnets.