

LED\_Downlight family

IP20

IK03



T<sub>a</sub>25

5



**THE FAMILY OF PENDANT AND SURFACE MOUNT DOWNLIGHT OPERATING AT 3 W, 220-240 VAC INPUT. DELIVERING OUT STANDING PERFORMANCE OF 330LM.**

## Technical description



A pendant and surface mount decorative LED luminaire, to be used as a dark light dome where needs emotional and sense luxury, Body: Extruded Anodized Aluminum (powder coating an option) Reflector made of pure anodized aluminum. Total power: 3 w, slave luminaire for DALI control (an option only) with LED converter. Chromaticity tolerance (initial Macadam: 3). Color rendering Ra > 80, color temperature 3000°- 6000K.

This product can be produced in height 200, 300, 400 and 600 mm.



## Application

- Decorative
- Accent light
- Hotel
- Office

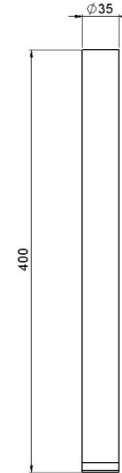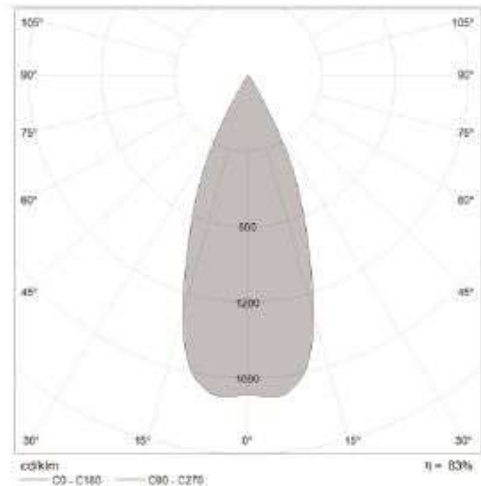

Correlated color temperature: 3000 – 6000 kelvin  
 Rated median useful life: 50000h L70 at 25°C Luminaire  
 input power: 3 w

Dimensions: Ø35 x 400 mm  
 Total power: 3 w  
 Luminaire luminous flux: 330 lm  
 Luminaire efficacy: 110 lm/w  
 Weight: 0.8 kg

## Mounting and installation

Pendant and surface mount the luminaire from the ceiling with special accessories is in the luminary's case.