

LED_Panel family IP20 -   T_a25    

THE FAMILY OF RECESSED BACK LIGHT LED PANEL OPERATING AT 45W, 220-240 VAC INPUT. DELIVERING OUTSTANDING PERFORMANCE OF 4500LM.



Technical description

A suspended LED luminaire, flat direct LED with PS diffuser ceiling illumination. (IP42 just for options). For 600 x 600 mm square baffle ceiling. Total power: 45w (Emergency system just for option), slave luminaire for DALI control (an option only) with LED converter. Chromaticity tolerance (initial Macadam: 3). Luminaire luminous flux: 4500 lm, Luminaire efficacy: 100 lm/w. Color rendering $R_a > 80$, color temperature 3000-4000 kelvin. It can be produced with deferent power (30 w, 45 w and 60 w) and different color temperature (3000 and 4000 kelvin).



Application

- Office
- Showroom
- Education
- Exhibition
- Hospital

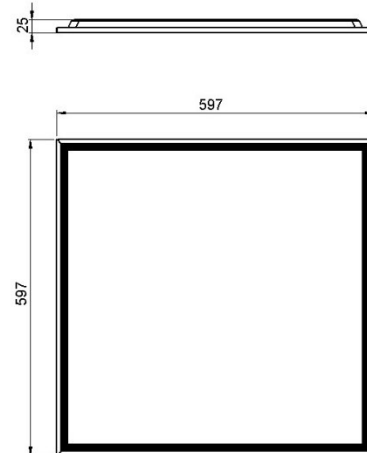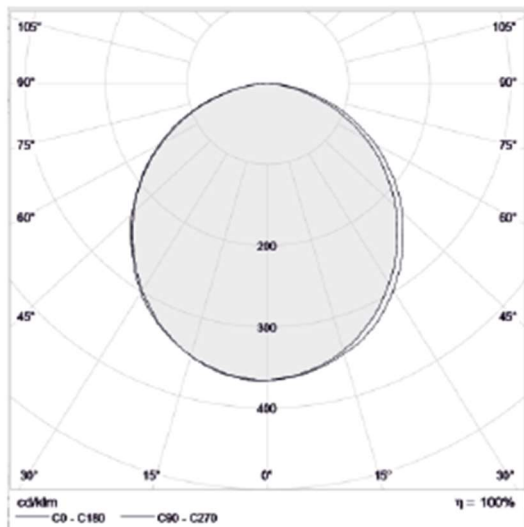

Correlated color temperature: 3000 – 6000 kelvin
 Rated median useful life: 50000h L70 at 25°C Luminaire
 input power: 45 w

Dimensions: 597 x 597 x 25 mm
 Total power: 45 w
 Luminaire luminous flux: 4500 lm
 Luminaire efficacy: 100 lm/w
 Weight: 2.5 kg

Installation and Mounting

Recessed and Surface mounting with special accessories to be ordered
Cut of this lamp is 575 mm.