

TABAN DUAL

LED_Downlight family

IP20

IK03



T_a25

5



THE FAMILY OF RECESSED BACK LIGHT LED PANEL OPERATING AT 2x35W,
220-240 VAC INPUT.DELIVERING OUT STANDING PERFORMANCE OF 2x3850LM.




Technical description

Taban is offered in LED version with Robust luminaries housings made of iron. Fixed reflector and rotating light source. Directed light distribution, energy saving, glare control, and aesthetically beautiful design are among the highlights of this multi-down light. visually comfortable light for working living and learning. light where you need it, accommodate different. Class I electrical, IP20 (IP54 just for option), Ik03. LED color temperature is 3000-6000 kelvin. Up to 80% energy saving compared to halogen. Downlight luminaire with 2x35w, warm with and cool white led for in door applications, , All LEDs are with 3 steps macadam ellipse to ensure color consistency...



Application

- Restaurant
- Hotel
- Retail

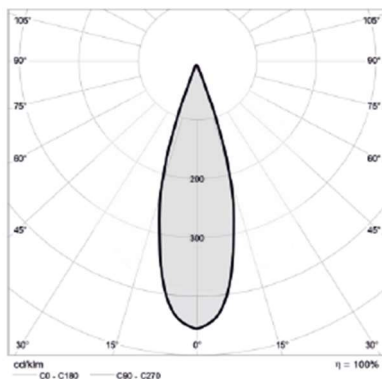

Correlated color temperature: 3000 – 6000 kelvin
Rated median useful life: 50000h L70 at 25°C Luminaire
input power: 2 x 35 w

Dimensions: 356 x 205 x 139 mm
Total power: 2 x 35 w
Luminaire luminous flux: 2 x 3850 lm
Luminaire efficacy: 110 lm/w
Weight: 3.5 kg

Mounting and installation

Suitable for indoor recessed, ceiling mounting, Simple installation with fitting springs.

Cut out dimension: 325 x 170 mm.