

# INSIDE RING 90

**AREND**  
INVESTING IN LIGHT

LED\_Panel family

IP20

IK03



T<sub>a</sub>25

5



**THE FAMILY OF SURFACE AND PENDANT MOUNTED PANEL OPERATING AT 90W,  
220-240 VAC INPUT. DELIVERING OUTSTANDING PERFORMANCE OF 9000L**

## Technical description



Luminaire was designed to be used white LEDs for illumination purposes can be surface and pendant mounted, Wide and uniform light distribution for decorative application. Down light luminaire with 90 w, 3000-6000 kelvin LEDs for indoor applications. Robust luminaire housings made from iron cast, Diffuser is polycarbonate. All LEDs are within a three step Macadam ellipse to ensure color consistency. Energy saving is up to 90% in comparison with traditional light sources. Can be fitted as recessed, pendant or surface luminaire using special accessory.

Standard Diameters: 60 & 90 & 120cm



## Application

- Office
- Education
- Exhibition
- Hospital

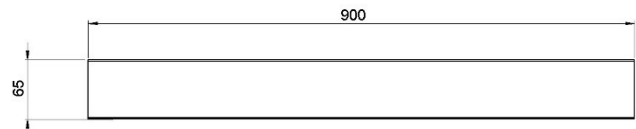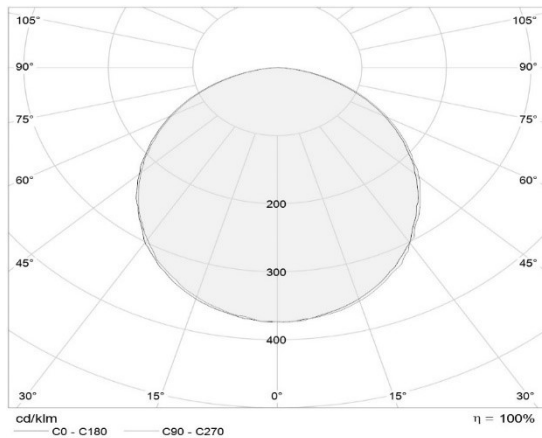

Correlated color temperature: 3000-4000-6000 kelvin  
Rated median useful life: 50000h L70 at 25°C  
Luminaire input power: 90w

Dimensions:  $\Phi$ 900 x 65 mm  
Total power: 90w  
Luminaire luminous flux: 9000lm  
Luminaire efficacy: 100 lm/w  
Weight: 5 kg

## Mounting and installation

Surface and pendant mounting with special accessories to be ordered